

Hose reels THE UNMISSABLE

Industrial quality - European manufacturing

3 years
Warranty

KPU hose

Exclusive model

Strong : resistant to abrasion and pressure

No memory effect : no spirals

Extremely flexible : easy to manipulate with all conditions of use (from -5°C to +50°C)


No throttling : even if kinked, it does not close the air duct




Classic hose



KPU hose



Classic hose



KPU hose

For air and water

Max pressure : 15 bar

Equipped with end hose fitting

1,50 meter incoming hose




Technopolymer casing

Swivelling bracket

Removable ratchet



In case of vertical use (reel on the ceiling), free on demand mandatory option, to transform the swivelling bracket into a fixed bracket (code **ERXVA3P3**)

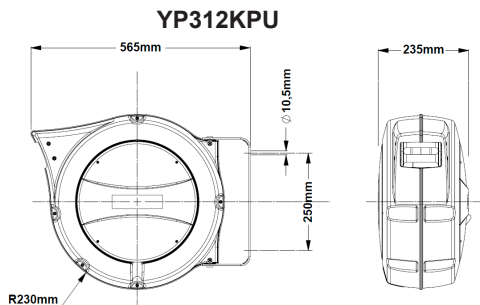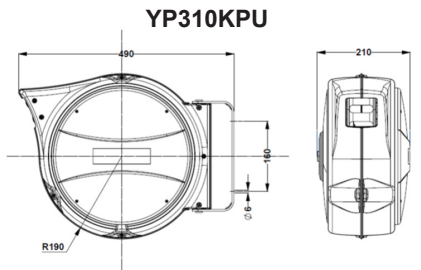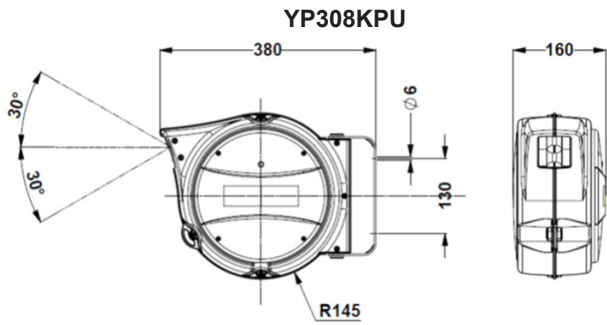

YP308KPU



YP310KPU



YP312KPU

Length	Interior hose Ø	ATEX	Hose type	Max pressure	End hose fitting	Dimensions	Weight	Model	Code
10 meters	8 mm / 5/16"	No	Blue KPU	15 bar	1/4" M BSP	H290 x I380 x P160 mm	3,35 kg	YP308KPU	Y-10-5/16-20-YP308KPU
16 meters	10 mm / 3/8"	No			3/8" M BSP	H380 x I490 x P210 mm	6,30 kg	YP310KPU	Y-16-3/8-20-YP310KPU
	12,5 mm / 1/2"	Yes			1/2" M BSP	H460 x I565 x P235 mm	8,70 kg	YP312KPU	YATX-16-1/2-20-YP312KPU